


# CARRIER DOOR

Our Carrier door uses a double-track rail to create a maximum opening at a minimum space. It consists of a wall panel and two door-leaf panels. When closed the first door leaf has carried the second door-leaf to the middle position and when fully opened the two door-leaf panels overlaps the wall panel at the same space in width.

There are 2 width options:

1. Door leaf 980+980 mm with wall panel 1000mm
2. Door leaf 1180+1180 mm with wall panel 1200 mm

Opening height is 2200 mm. Lock options are padlock, euro cylinder and assa cylinder. The runners above the door-leaf panels slide in a double-track aluminium top rail and guide rails beneath the door-leaf panels steer them firmly in the right direction.

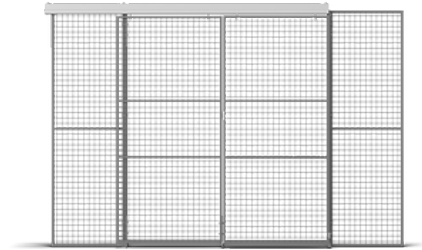

## FACTS

ART. NO	COMPONENTS
36905630	Kit 5630 Carrier door WP

# ACCESSORIES



SECURE FASTENERS

---


# COMBINE WITH



POST 60X40 WP



POST 80X80 WP



PANEL UX450  
PARTITIONING  
SYSTEM



PANEL UR350  
PARTITIONING  
SYSTEM



PANEL UR325  
PARTITIONING  
SYSTEM

---



CARRIER DOOR

MACHINE GUARD  
WAREHOUSE PARTITIONING

# IMAGES

