


PANEL UX550

Security was the main focus in the development of UX 550, our most advanced and secure mesh partition. The mesh, constructed from press welded 5 mm wires with mesh aperture 50x50 mm, is welded to a 30x20 mm tubular frame for added strength. The system has been tested and is approved in accordance with SSF 1990-06-30/B. UX 550 is primarily used in storage spaces in apartment buildings, cellars and attics, where there is a requirement for an extra high level of security. Troax Safe front wall can be complemented with inner partitioning walls from the UX 450 and UR 350 series, though a partitioning wall with UX 550 is the safest choice. The panel is available in 7 widths between 200 mm up to 1500 mm.

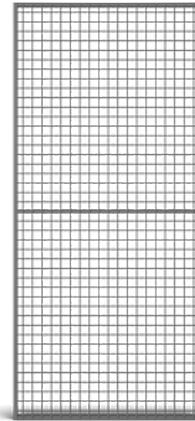


FACTS

ART. NO	COMPONENTS	HEIGHT (mm)	WIDTH (mm)	MESH SIZE (mm)	FRAME (mm)
36020101	Panel UX550 2200x200	2200	200	50x50	30x20
36030101	Panel UX550 2200x300	2200	300	50x50	30x20
36070101	Panel UX550 2200x700	2200	700	50x50	30x20
36080101	Panel UX550 2200x800	2200	800	50x50	30x20
36100101	Panel UX550 2200x1000	2200	1000	50x50	30x20
36120101	Panel UX550 2200x1200	2200	1200	50x50	30x20
36150101	Panel UX550 2200x1500	2200	1500	50x50	30x20

Finish on panels, posts and powder coated accessories has the last figure variants in **ART. NO.**

"1" = RAL 7037 Dusty Grey; "2" RAL 1018 Zink Yellow; "5" All other RAL colours or cut/welded; "6" RAL 9005 Jet Black, "8" Hot dip galvanized

ACCESSORIES




SHELF


COMBINE WITH



DOOR UX500



DOOR UX550



PANEL UX450



PANEL UR350

IMAGES

