


DOOR UX550

The Troax Safe UX550 is a door for cylinder, designed to be used with UX 550 mesh panel system and is suitable for storage areas in need of the highest level of protection and is part of a system with specially adapted installation fittings, like corner and wall profiles. The system is used in areas which are particularly exposed to break-in attempts. This door can also be used as interior area protection between different rooms. The frame of the door leaf consists of one tube 40x20 mm, one lock profile in full length 90x50 mm, six cross tubes 30x20 mm and a big cover plate in the middle. Together with the 50x50 mesh aperture and the 5 mm wire thickness gives this a considerable impression of safety and can also live up to it.

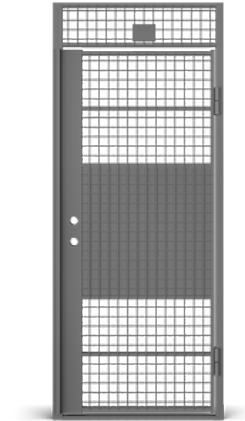

FACTS

ART. NO	COMPONENTS	HEIGHT (mm)	WIDTH (mm)	MESH SIZE (mm)	FRAME (mm)
36090381	Door frame UX550 R STEP40	2200	900		30x20
36090391	Door frame UX550 L STEP40	2200	900		30x20
36090521	Door UX550 AC 900 R.	2200	900	50x50	30x20
36090531	Door UX550 AC 900 L.	2200	900	50x50	30x20
36090541	Door UX550 EC 900 R	2200	900	50x50	30x20
36090551	Door UX550 EC 900 L	2200	900	50x50	30x20
88090521	Door leaf UX550 AC 900 STEP40	1920	900	50x50	30x20

Finish on panels, posts and powder coated accessories has the last figure variants in **ART. NO.**

"1" = RAL 7037 Dusty Grey; "2" RAL 1018 Zink Yellow; "5" All other RAL colours or cut/welded; "6" RAL 9005 Jet Black, "8" Hot dip galvanized

ACCESSORIES



DOOR SYSTEM
HOLDER
NUMBERPLATE




STORE ROOM
NUMBERING



DOOR CLOSER


COMBINE WITH



PANEL UX550



PANEL UX450



PANEL UR350

IMAGES

