


DELTA 4 BEAM

The TÜV-tested and flexible d-flexx safety barrier Delta is an innovative and economic separation of pedestrian areas and trails. Additionally to the 3 beams Delta safety barrier we now offer you two variants of the Delta barrier with 4 beams. The Delta barrier in 1200 mm height with four beams offers a protection with a difference of only 329 mm to the ground for more protection. Due to the modular system a customized solution can always be supplied by means of individual cuttings. The mounting material is always included in the scope of delivery of the d-flexx Safety Barrier Delta. The fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

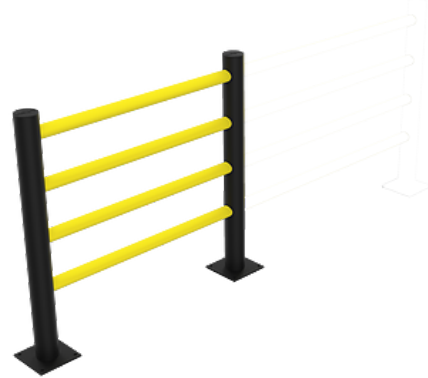

Width: 110 mm

Length: Customized Lengths

Height: 1200 mm

FACTS

ART. NO	COMPONENTS	
12000018	Delta Bollard	4 Beams
12000019	Delta End post	4 Beams
12000020	Delta Cross post	4 Beams
12000021	Delta Middle post	4 Beams
12000022	Delta T-post	4 Beams
12000023	Delta Corner post	4 Beams
12000024	Delta End post	4 Beams, H=1600mm
12000025	Delta Cross post	4 Beams, H=1600mm
12000026	Delta Middle post	4 Beams, H=1600mm
12000027	Delta T-post	4 Beams, H=1600mm
12000028	Delta Corner post	4 Beams, H=1600mm
12000029	Delta Standard beam	4 Beams, L=1500mm
12000030	Delta Individual beam	4 Beams, L=200-1499mm

Technical Information

- Tested to withstand force of (Joule) 2.500J
- Vehicle weight equivalent (kg) 2.000 kg
- Vehicle equivalent speed (km/h) 5,7 km/h
- Equivalent angle of impact 90°
- Deflection zone 250 mm

Material Properties

- Chemical Resistance high - ISO/TR 10358
- Temperature Range -10° up to + 50°
- Recyclability 100%
- Material: Polyethylene

Other

- Color: Yellow (like RAL 1018 traffic yellow) / black
- Indoor use: Yes
- Outdoor use: Yes
- Boreholes: 4
- Fixing: The fixing material is included.
- Fixing dimensions: M10X70 mm


COMBINE WITH



CHARLIE



ECHO



DELTA COLUMN



DELTA 3 BEAM



JULIET