



Cable M12 2,5m Male/Male

Troax art: 89051554

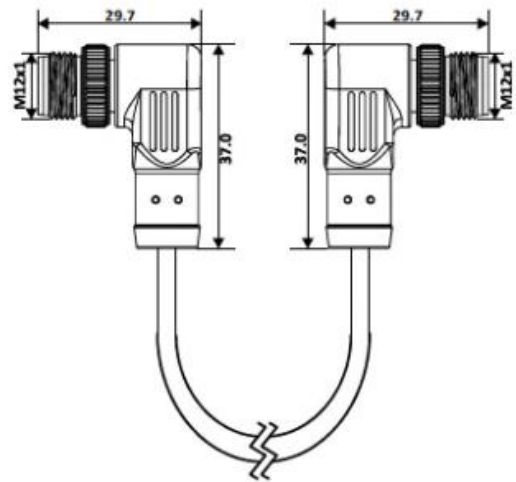

All dimensions are in mm.

| | |
|------------------------------|--|
| Rated Operational Voltage: | 60V |
| Current Rating: | 4A |
| Temperature Range: | -25°C...+85°C |
| Coding: | A-Coded |
| Contact: | Cu-Zn |
| Contact Plating: | Gold Flash |
| Color: | Black |
| Coupling Nut: | Brass Nickel-Plated |
| Cable Type: | 5 Core Multi Strand PUR |
| Cross section of conductor: | 0,34mm ² / 22 AWG |
| External cable diameter: | 5,3±0,3mm |
| Protection: | IP67 |
| Insertion/withdrawal cycles: | 100 Min |
| Tightening torque: | 0,6 Nm |
| Length: | 2.5 Meters -0% +5% |
| Pin Color: | 1: Brown 2: White 3: Blue 4: Black 5: Gray |



Date: 2022-10-25

Version: 1

Product group: Standard

Drawn: JaLun