


Instructions for use

Special tool for opening Troax Rapid Fix and Panel Detection
from the outside of the machine guard.
Article no: 36908510.



Thank you for choosing Troax Machine Guard system. Please follow these instructions for use to ensure the correct operation of your new system along with this special tool. The system shall always be installed according to the Troax assembly instructions in order to function correctly. During installation and assembly, make sure to use personal protective equipment.

Before using this special tool, you must:

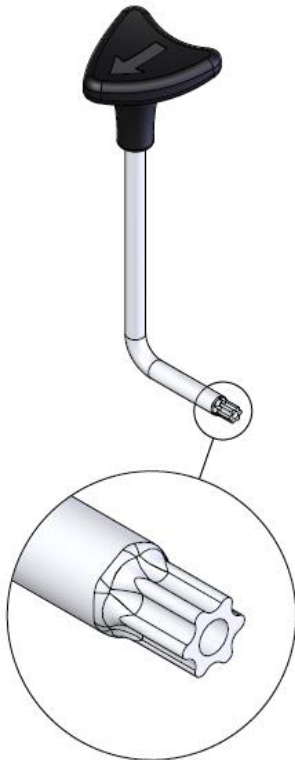

1. Perform a risk assessment according to ISO 12100:2010,
 - that will verify that the only possible way to open the guard is from the outside.

or

 - that the guard is monitored and will stop safely without hazards when opened from outside.
2. The risk assessment shall verify the use of this tool without risk.
According to ISO 14120 8.5 the user shall provide indicating actions to be taken before guards are removed, for example machine power isolation, dissipation of stored energy, and procedures for the removal of guards. The information shall also prescribe requirements on procedures for the removal of guards, including appropriate use of a tool and safe working procedure.
3. Before opening the guard, the machine shall be stopped in accordance with ISO 14118:2017.
or
The machine is to be stopped safely by the opening action.

Address

Troax AB
Box 89
SE-335 04 Hillerstorp
Sweden

Telephone

+46 (0)370 828 00
E-mail
info@troax.com

Reg.No.

556093-5719

Website

www.troax.com