


# PEDESTRIAN GATE



The Pedestrian Gate channels movement from safe walkways into mixed traffic areas, resulting in a measured level of risk exposure. Combined with Pedestrian Guardrails and Barriers, it forms an integrated guidance system that ensures smooth traffic flow and maximum safety. An optional metal gate stop and self-closing hydraulic hinges enable safe and intuitive use.



## DIMENSIONS

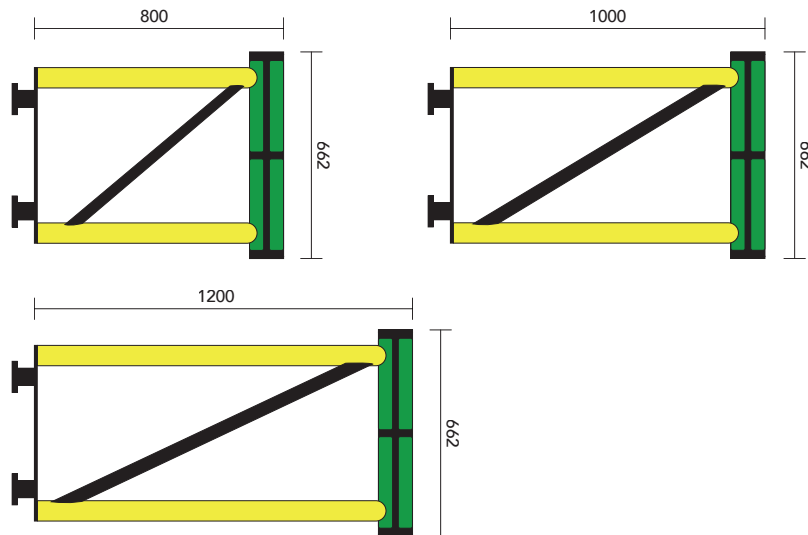

Dimensions in mm


## COMPATIBLE WITH



PEDESTRIAN SEGREGATION



PEDESTRIAN GUARDRAIL

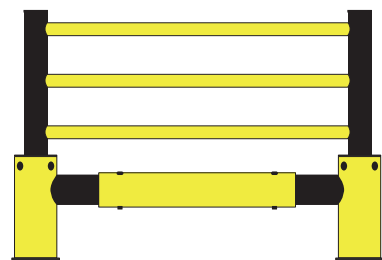

PEDESTRIAN BARRIER

# MATERIAL PROPERTIES

Material	Polyethylene
Operational Temperature Range	-40°C to +50°C
Ignition Temperature	350-360°C
Flash Point	350-360°C
Food Contact	Regulation (EC) No. 1935/2004 FDA, CFR, Title 21, §177.1520 Olefin Polymers
Chemical Resistance	High-ISO / TR 10358
UV Stability	Gray Scale 5/5 Blue Wool Scale 8/8 Tensile Strength - No change
Surface Resistivity	10 <sup>15</sup> -10 <sup>16</sup> Ω
Yellow	RAL 1018
Black	RAL 9005
Fixing	Zinc-coated bolts Ø10 x 70 mm

