


ELAN PANELS

The Elan double skin steel partitioning system is comprised of modular Elan panels which are available in All Steel, Steel Glass Steel, Steel Glass, All Glass and Chair Rail. Available panels sizes are shown in the table below.

The panels are manufactured from 0.7mm thick steel, with a panel depth of 51mm, and infill options include mineral wool or besin.

Single and double glazed panel options are available.

Panels are available in both standard and fire rated options, achieving up to a 60 minute fire rating. Elan offers additional acoustic and thermal properties.

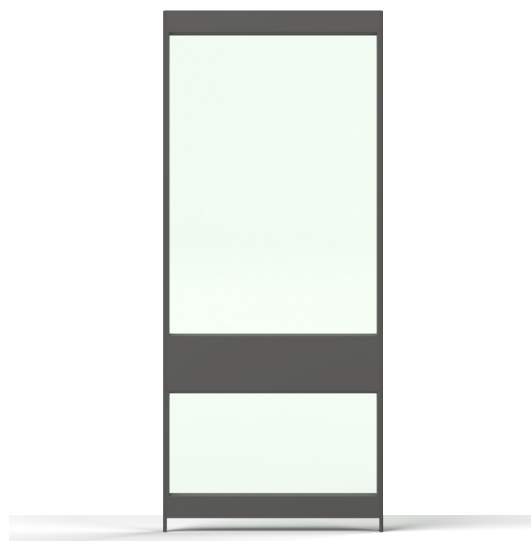



PANEL FACTS

| Variations | Max Widths | Max Heights | Dado Heights | Glazing Vertical Opening |
|-------------------------|-----------------|------------------|--------------|--------------------------------|
| All Steel (AS) | 900mm 1000mm | 3657mm 2743mm | N/A | N/A N/A |
| Steel Glass Steel (SGS) | 900mm 1000mm | 3657mm 3048mm | 1091mm | 940mm 940mm |
| Steel Glass (SG) | 900mm 1000mm | 3657mm 3048mm | 1091mm | 1295mm 1295mm |
| All Glass (AG) | 900mm 1000mm | 3657mm 3048mm | N/A | 2500mm 2500mm |
| Chair Rail (CR) | 900mm 1000mm | 3657mm 3048mm | 914mm | 940/1295mm Top Glazing Size |

Standard widths are supplied in 100mm increments. Custom panel heights and widths are available on request. Panels can be configured in multiple lifts to achieve a desired partition height. Structural considerations may need to be made.

PANEL HEIGHT VARIATIONS

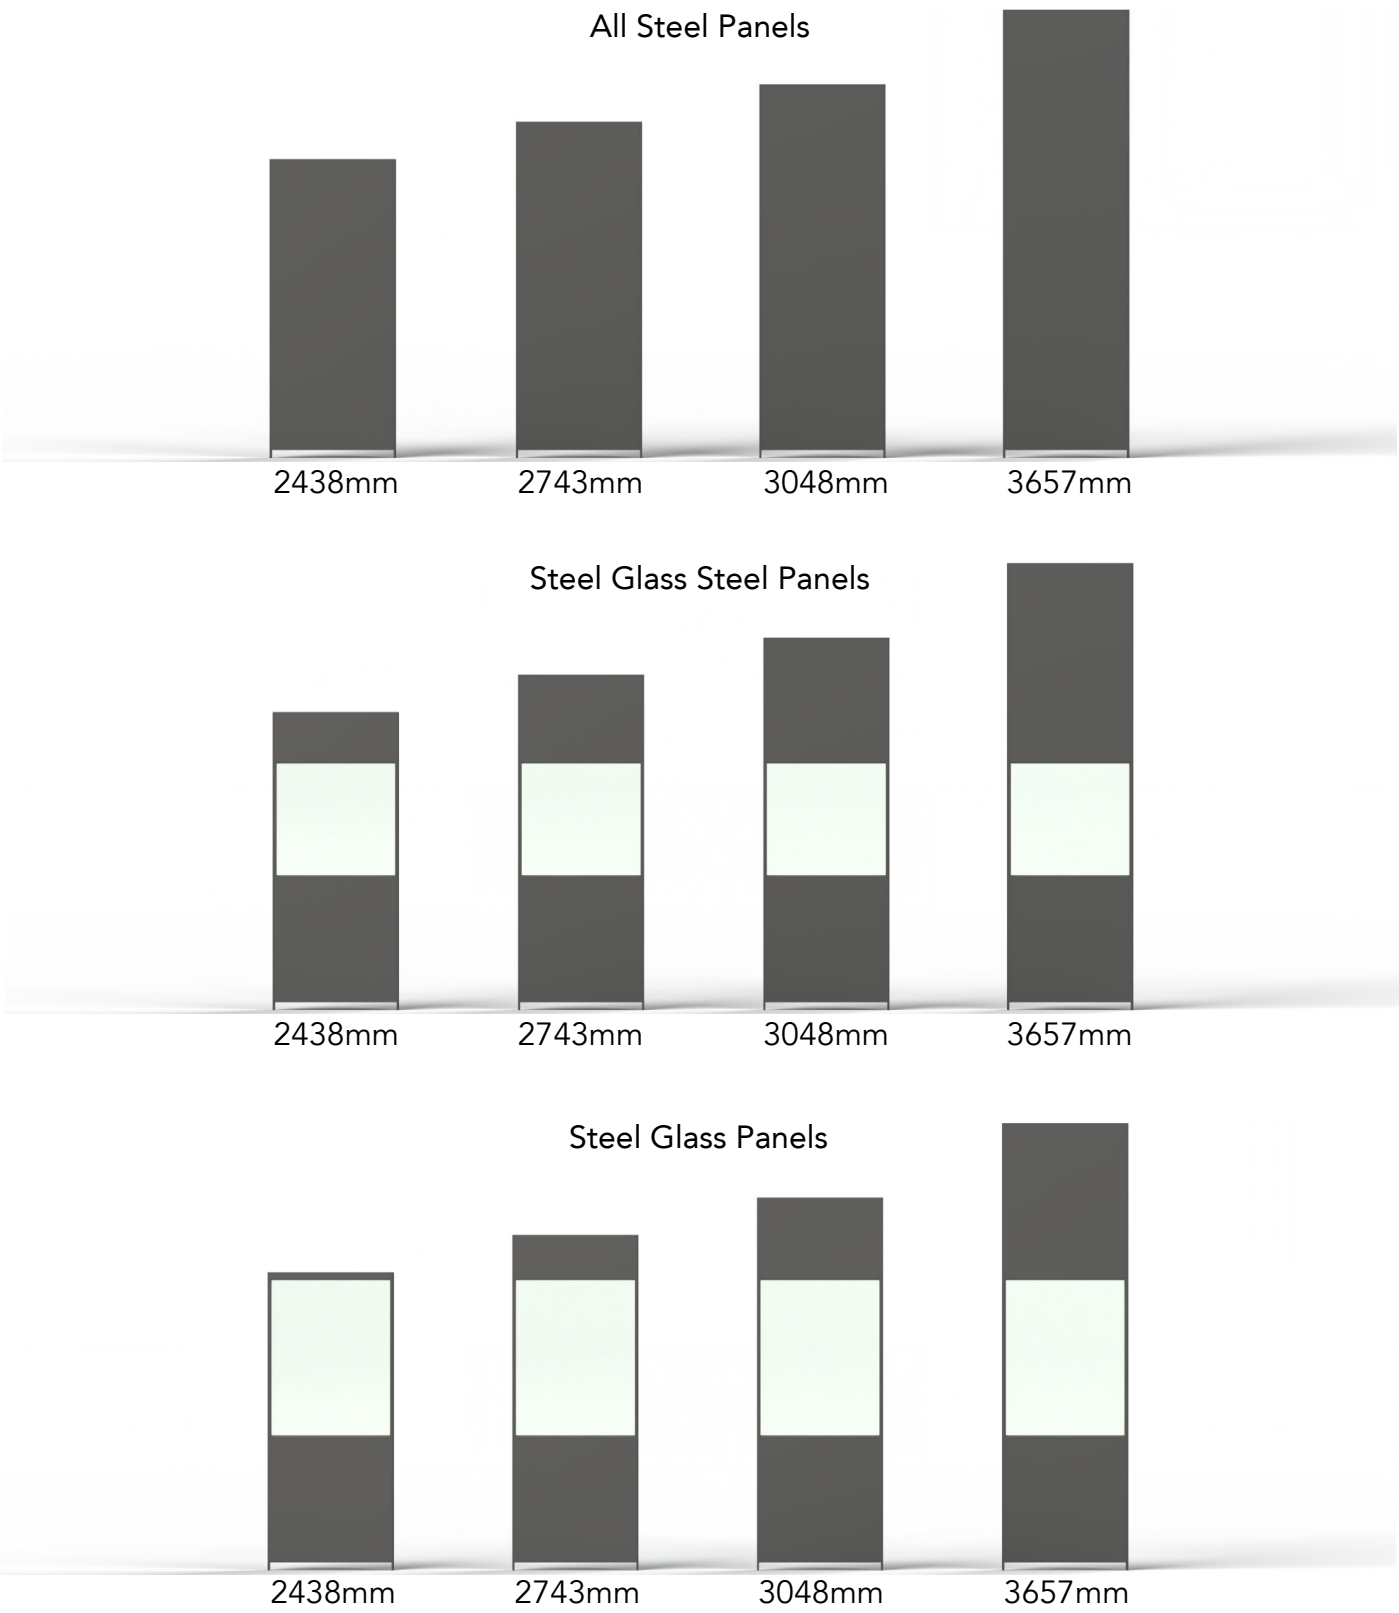

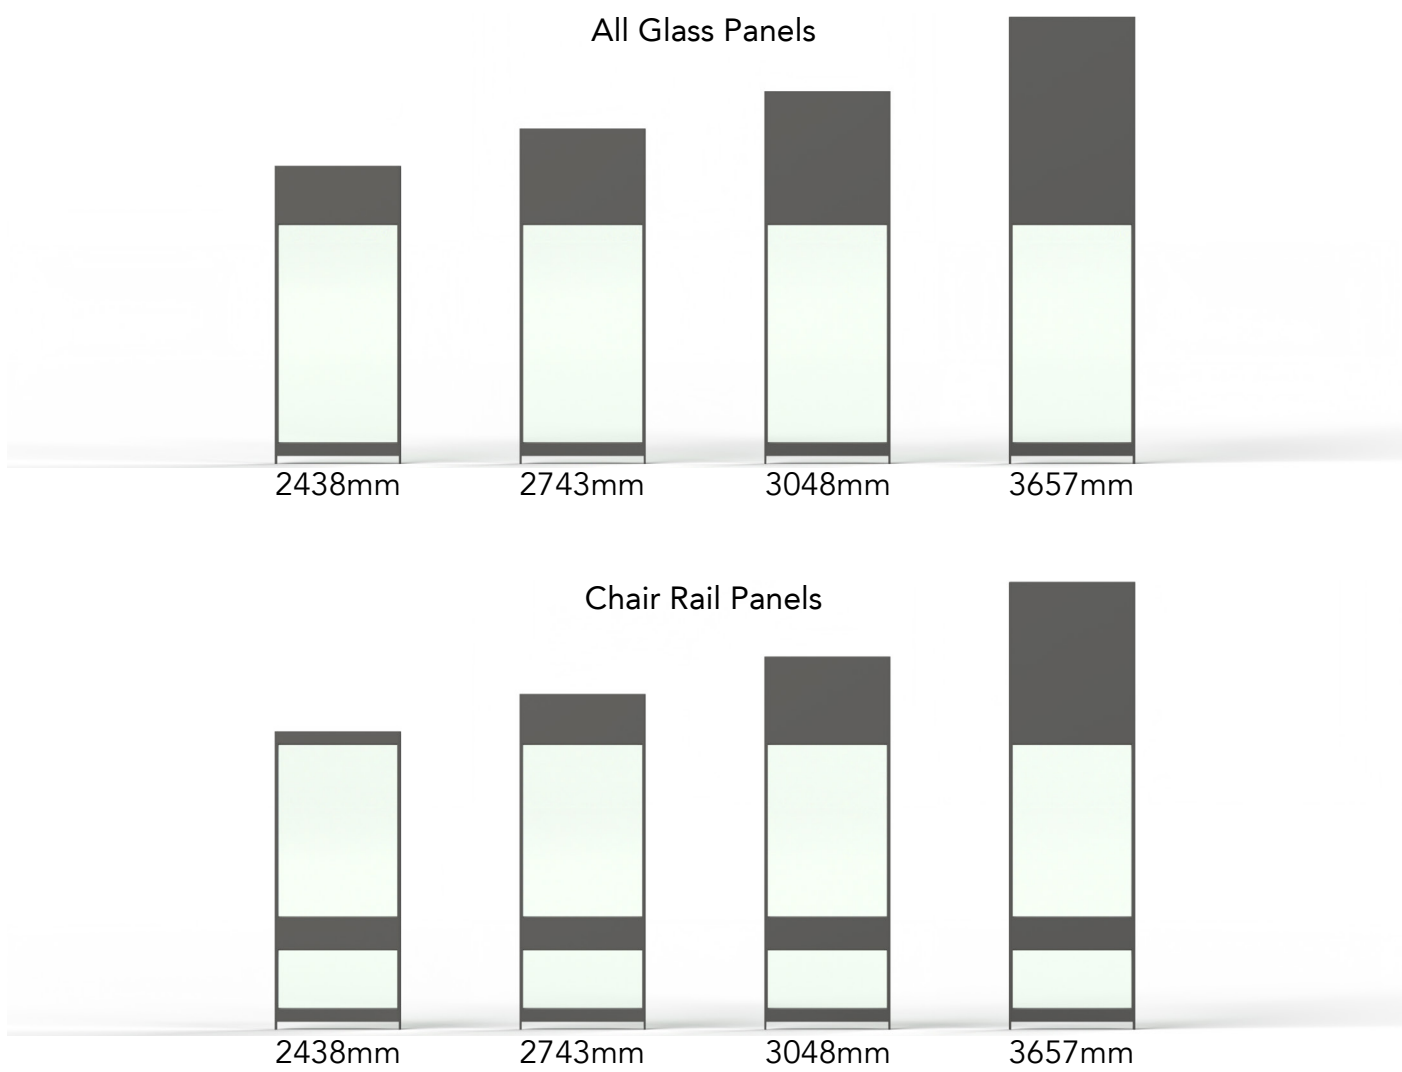

Images are for indicative purposes only, based on illustrated height panels. Configuration may vary depending on specific project requirements.

GALLERY



Indicative panel combination images.