


Door UX 550 Padlock

The Troax Safe door is designed to be used with UX 550 mesh panel system and is suitable for storage areas in need of highest level of protection and is part of a system with specially adapted installation fittings. The System has been tested and approved by the Swedish Theft Prevention Association (SSF) and is used in areas which are particularly susceptible to break-in attempts. The door leaf has a 30x20 mm steel tube frame and two horizontal tubes to create strength and stability. The 50x50 mesh aperture also makes it virtually impossible for a hand to reach through the mesh. Doors are supplied pre-assembled, ready for installation.

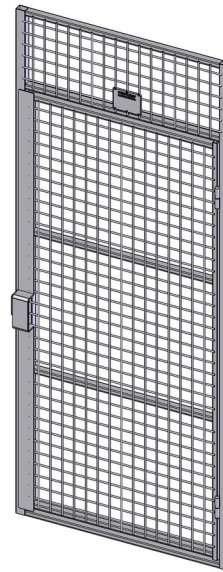


FACTS

Door Dimensions

Height (mm)	Dooropening height (mm)	width (mm)
2200	1860	900

Mesh size: 50x50 mm, tube doorblade 30x20x1,5 mm, wire 5x5 mm,

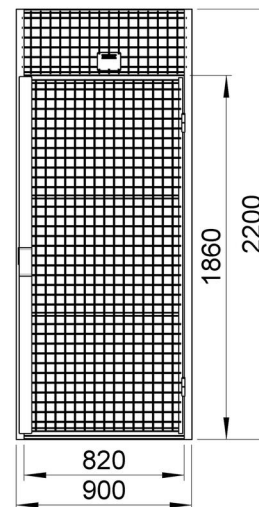

ACCESSORIES

Profiles

- Single profile UX 550 L=2160
- Join profile UX 550 L=2160
- Corner profile UX 550 L=2160 outwards
- Corner profile UX 550 L=2160 inwards
- Wall profile UX 550 L=2160
- Join profile UX 550 L=2160 cyl. door

