


## Machine guard full steel

The full steel machine guard panels offer good protection for applications with welding or splash risk. With the Safe Fix system that mounts the panels in front of the posts, you will get the cell completely covered.

The profiled steel sheet is 0,7 mm and welded on to a 19 x 19 mm frame. The URSP panel is tested to withstand an impact of 309 joules.

Standard panels are available in 6 widths, from 200 mm to 1200 mm to fit a system height of 2200 mm, without a floor gap.

Standard colour for the ST Full URSP Steel panel is grey RAL 7037. Any colour of your choice can be offered.

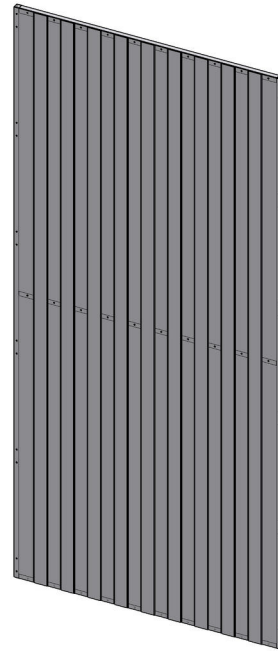

### FACTS

#### System Height 2200 mm


Panel Height (mm)	Panel Width (mm)
2200	200
2200	300
2200	700
2200	800
2200	1000
2200	1200

Size: tube 19x19 mm, steel sheet 0,7 mm

#### Door dimensions, system height 2200 mm

Door blade Height (mm)	Door blade Width (mm)
2100	980
2100	1180

Steel thickness 0,7 mm, tube 30x20 mm

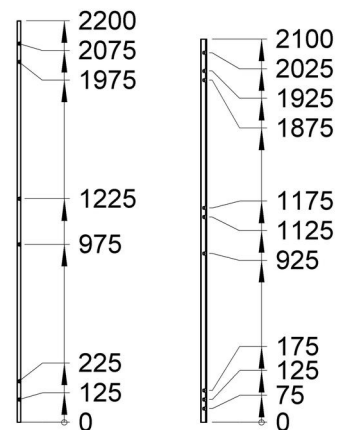

### ACCESSORIES

The URSP panels can be adjusted to your requested size either by using our cut profile or by ordering a special sized panel from factory.

Gap Cover L= 2200 mm

The Gap Cover can be used together with the Smart Fix system to cover the gap between panels and posts.

URSP panels are tested to withstand an impact of up to 309 joules with any of the fixing systems.

