

LINEAR SLIDING DOOR

The linear sliding door can be built with our mesh and polycarbonate panels to fit your chosen machine guard system. Use the standard panel heights 2,050 mm or 1,250 mm in up to 6 widths. You can also combine the standard panels or order special width panels to create the required door blade size.


The door is supplied as separate panels, posts, and door kit for assembly on site.

The Linear sliding door runs on roller bearings at the top and bottom of the door panel, making it a very stable sliding door even for large door sizes. It creates a door opening with clear access in height, making it a good choice when you need access with forklifts for example.

Depending on the risk assessment, you choose the preferred lock for your door. The Linear door can be equipped with the Troax Safe Lock which is compatible with many safety switches.

The Linear sliding door is available in 5 widths; 1,800 mm, 2,500 mm, 3,000 mm, 3,500 mm and 4,250 mm.


The standard opening width is approximately 1,800-4,000 mm.

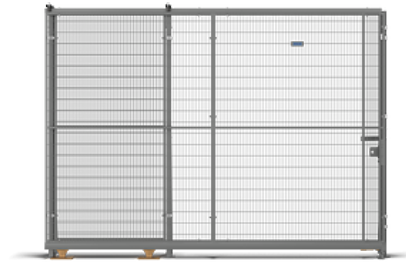


FACTS

ART. NO	COMPONENTS
36906430	Kit 6430 Linear Sliding Door
36906440	Kit 6440 Guide Linear 60x40 post
36906450	Kit 6450 Guide Linear 80x80 post
36906460	Kit 6460 Reinforcement High Linear


ACCESSORIES




SAFE LOCK PLD




SAFE LOCK PLE



SAFE LOCK PLD GL



SAFE LOCK PLE GL



EURO CYLINDER
LOCK


COMBINE WITH



POST 60X40



POST 80X80



PANEL ST30



PANEL ST PC

IMAGES

