

SINGLE HINGED DOOR

The hinged door can be built from our mesh, polycarbonate or steel sheet panels to fit your chosen machine guard system. Use the standard panel heights 2,050 mm or 1,250 mm in up to 6 widths. You can also combine the standard panels or order special width panels to create the required door blade size.


The single hinged door can be ordered pre-assembled with lock and safety switch from the factory, or as separate panels, posts, and door kit for assembly on site.

Depending on the risk assessment, you can choose the preferred lock for your door; magnetic, Euro cylinder, Panic Bar, Safe Escape Lock, Safe Lock or any other type of handle solution with or without a safety switch included. The Single hinged door is tested and withstands an impact of 1600 joules equipped with a Safe Lock.

The single hinged door can also be built using the Kit Door Frame Fixings, creating a frame around the door, with the possibility to dis-assemble the door stay for free access in height.

Troax machine guard systems are so versatile that you can convert a standard wall panel in your system to a door, just by adding our door kit.


Standard opening width is approximately 500-1,500 mm.

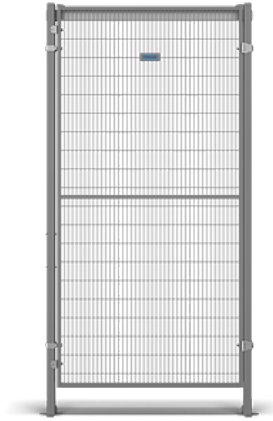

FACTS

ART. NO	COMPONENTS
36905000	Kit 5000 hinged d.no lock
36905500	Kit 5500 hinged dorr no lock ES
36908150	Kit 8150 Hinged door 80x80


ACCESSORIES




DOOR FRAME
FIXINGS




SMART POST



SAFE LOCK PLD



SAFE LOCK PLE



SAFE LOCK PLD GL


COMBINE WITH



POST 80X80



POST 60X40



PANEL ST20



PANEL ST30



PANEL ST PC



SINGLE HINGED DOOR

MACHINE GUARD

IMAGES

