


SAFE LOCK PLD

The Safe Lock is Troax own designed lock that is fitted with two bolts directly on the panels which makes it fast and easy to install. It's equipped with the chosen safety switch actuator and fixings for the safety switch included. The door is held closed with a strong metal bolt and the Safe Lock is impact tested withstand an impact of 1,600 joules.

The escape release handle is designed to fit between the mesh apertures avoiding the need to cut any wires. A blind rivet can be added to fix the lock to the door blade to prevent tampering. When the door is in an open position, a padlock can be fixed to secure the lock and prevent the door from being closed during maintenance.

The Safe Lock with Performance Level d is suitable for low, medium to high-risk applications where the machine stops immediately when the door is opened. The result of your risk assessment will determine the required performance level required for your safety control system.

The Safe Lock PLd can be equipped with the following safety switches; Guardmaster Trojan 5, Telemecanique XCS-A702, Schmersal AZ16-12 ZVRK, Euchner NZ1VZ-2131D.

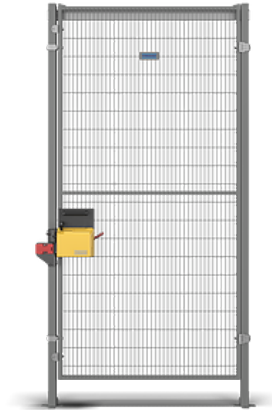

FACTS

ART. NO	COMPONENTS
29931011	Safe Lock GMS PLd R Trojan5/SICK i17
29931012	Safe Lock GMS PLd L Trojan5/SICK i17
29932011	Safe Lock TLM PLd (GL) R XCS-A
29932012	Safe Lock TLM PLd (GL) L XCS-A
29933011	Safe Lock EUN PLd R NZ1VZ
29933012	Safe Lock EUN PLd L NZ1VZ
29934011	Safe Lock SMR PLd R AZ 16
29934012	Safe Lock SMR PLd L AZ 16

ACCESSORIES



SAFETY SWITCHES
PLD

COMBINE WITH



SINGLE HINGED
DOOR



DOUBLE HINGED
DOOR



SINGLE SLIDING
DOOR



DOUBLE SLIDING
DOOR



DOUBLE RAIL
SLIDING DOOR

IMAGES

