


# DELTA COLUMN

The column protector Delta consists of four corner posts of the Delta safety barrier, which are connected with the associated spar sets to a square. The height of the column protection amounts to 1,200 mm, the spar sets can be ordered in lengths of 705 mm and 1,510 mm. Of course, the column protection Delta also offers the possibility of ordering individual lengths between 350 mm and 1,510 mm.

Width: 705 mm / 1510 mm / individual

Length: 705 mm / 1510 mm / Customized Lengths

Height: 1200 mm

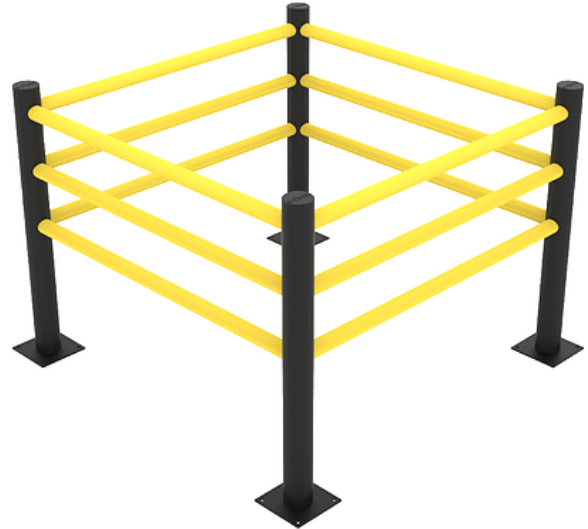

## FACTS

ART. NO	COMPONENTS
12000031	Delta Colomn Protector L=600mm
12000032	Delta Colomn Protector L=1305mm
12000033	Delta Colomn Protector Individual length

### Technical Information

- Tested to withstand force of (Joule) 2.500J
- Vehicle weight equivalent (kg) 2.000 kg
- Vehicle equivalent speed (km/h) 5,7 km/h
- Equivalent angle of impact 90°
- Deflection zone 250 mm

### Material Properties

- Chemical Resistance high - ISO/TR 10358
- Temperature Range -40° up to + 50°
- Recyclability 100%
- Material: Polyethylene

### Other

- Color: Yellow (like RAL 1018 traffic yellow) / black



DELTA COLUMN

MACHINE GUARD  
WAREHOUSE PARTITIONING  
AUTOMATED WAREHOUSE

- Indoor use: Yes
- Outdoor use: Yes
- Boreholes: 4
- Fixing: The fixing material is included.
- Fixing dimensions: M10X70 mm



DELTA COLUMN

MACHINE GUARD  
WAREHOUSE PARTITIONING  
AUTOMATED WAREHOUSE

## COMBINE WITH



BRAVO



DELTA 3 BEAM



COLUMN  
PROTECTOR



DELTA 4 BEAM